



# NC951/SS

## STAINLESS STEEL DISABLED PERSONS TOILET ALARM

C-TEC's NC951/SS stainless steel disabled persons toilet alarm kit is ideal for use in hotels, leisure centres, supermarkets and other public buildings.

Simple to install (four core security cable is ideal for most applications), each kit comprises high quality brushed stainless steel wall-mounting accessories and a durable plastic ceiling pull unit specially designed for ease of use by the infirm.

For large multi-point applications such as multiple WCs, changing rooms, etc.) stainless steel four zone call controllers and wall mounting call points are also available.



Part of C-TEC's tried and trusted 800 Series Call System range, each NC951/SS disabled persons toilet alarm kit comprises:-

### An NC941/SS combined single zone call controller and power supply.

Used to provide power to the system, the NC941/SS includes an integral buzzer and a zonal alarm LED to provide audible and visual indication of a call. An on-board reset button is also provided for cancelling calls. This facility can be disabled if required.

### An NC806CS/SS Stainless Steel Overdoor Light with Sounder

Usually located above the door of the WC, the NC806CS provides additional audible and visual indication of a call. Its ultra-bright LEDs make it highly visible from a distance.

### An NC809DB/SS Stainless Steel Reset Button

Used to cancel calls generated via the NC807C ceiling pull. Usually sited inside the WC.

### An NC807C Plastic Ceiling Pull Unit


Used to generate a call on the system, the surface mountable NC807C has a confidence light, a six foot cord and two open sided triangular pulls for ease of use by the infirm.

### An NC949 Disabled WC Sticker

For flush mounting the NC951/SS stainless steel call controller use a 47mm steel back box such as the MK 878ZIC. For surface mounting, use the aluminium coloured MK K2212ALM (without knockouts) or MK K2214ALM (with knockouts) or similar.

For flush mounting NC806CS/SS stainless steel overdoor lights and NC809DB/SS stainless steel reset points use 25mm steel back boxes such as the MK 861ZIC. For surface mounting, use the aluminium coloured MK K2211ALM (without knockouts) or MK K2213ALM (with knockouts) or similar.

### TYPICAL WIRING

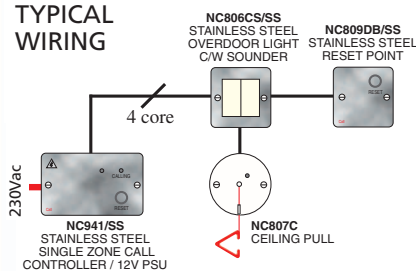

### OTHER DEVICES IN C-TEC'S 800 SERIES STAINLESS STEEL RANGE:

**The NC944/SS Stainless Steel Four Zone Call Controller:** Supplied on a UK double gang plate, the NC944/SS includes a buzzer, four zonal alarm LEDs, a MUTE button to silence standard calls and a RESET button to globally cancel all standard calls (both MUTE and RESET can be disabled). In addition to standard calls, the NC944/SS can generate a second, more urgent 'emergency' call. The NC944/SS derives its power from the separately available NC930/SS Stainless Steel 12V PSU to which up to two NC944/SSs can be connected to create a multi-zone system of up to 8 zones.

**The NC802DEM/SS Call Point:** With a call button, confidence light and magnetic reset target, the NC802DEM/SS can be used instead of a ceiling pull to trigger a call. It can be configured to generate standard or emergency calls.

